CXL-10

USHIO

Technical Information
No.040952①

Technical data

Rated Input Power		W	1000
Rated Current		A	45
Operating Current Range		A	35—50
Rated Voltage		V	20
Cold Arc Gap		mm	5
Lamp Length(L1)		mm	330
Lamp Length(L2)		mm	275
LCL(L3)		mm	125
Bulb Diameter		mm	ø 45
Base Diameter		mm	ø 25.4
Cathode Pin Diameter		mm	M14×P1.5
Anode Pin Diameter		mm	ø 14
Cable Length		mm	—
Operating Position	Vertical	°	±15
	Horizontal	°	±15
Base Surface Temperature		˚C	max. 200
Forced Air Cooling		m/s	5 to 7

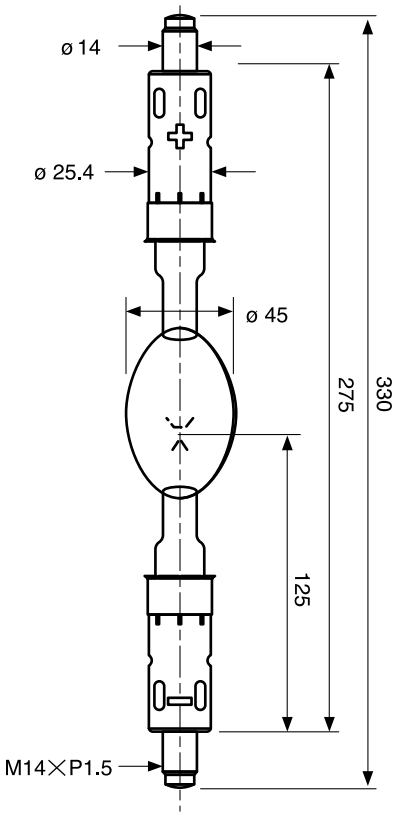

Memo

CXL-10S

USHIO

Technical Information
No.040943①

Technical data

Rated Input Power		W	1000
Rated Current		A	50
Operating Current Range		A	30—55
Rated Voltage		V	20
Cold Arc Gap		mm	4.2
Lamp Length(L1)		mm	235
Lamp Length(L2)		mm	205
LCL(L3)		mm	96.5
Bulb Diameter		mm	ø 40
Base Diameter		mm	ø 25
Cathode Pin Diameter		mm	5/16-18 UNC.
Anode Pin Diameter		mm	ø 11
Cable Length		mm	—
Operating Position	Vertical	°	—
	Horizontal	°	±15
Base Surface Temperature		˚C	max. 200
Forced Air Cooling		m/s	4 to 6

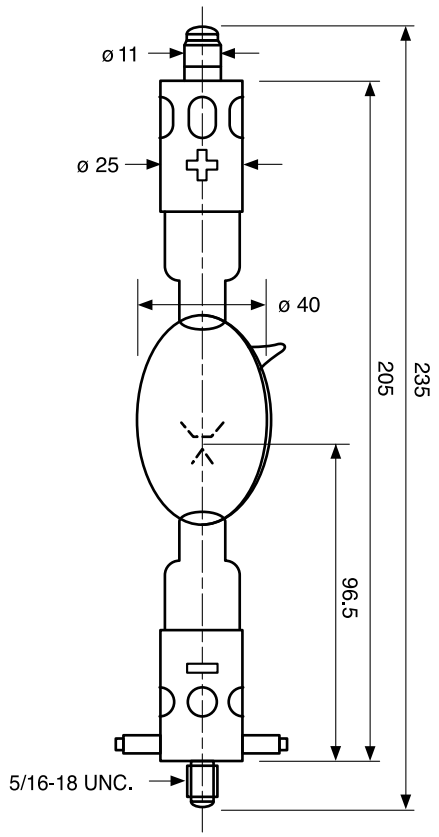

Memo

CXL-10SC

USHIO

Technical Information
No.040944①

Technical data

Rated Input Power		W	1000
Rated Current		A	50
Operating Current Range		A	30—55
Rated Voltage		V	20
Cold Arc Gap		mm	4.2
Lamp Length(L1)		mm	236
Lamp Length(L2)		mm	222
LCL(L3)		mm	96.5
Bulb Diameter		mm	ø 40
Base Diameter		mm	ø 25
Cathode Pin Diameter		mm	5/16-18 UNC.
Anode Pin Diameter		mm	—
Cable Length		mm	270
Operating Position	Vertical	°	—
	Horizontal	°	±15
Base Surface Temperature		˚C	max. 200
Forced Air Cooling		m/s	4 to 6

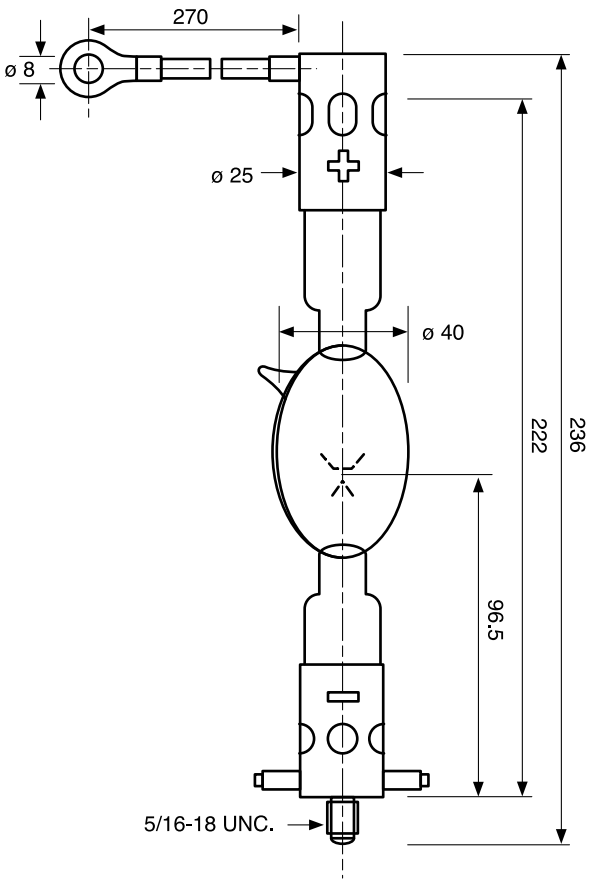

Memo

CXL-16S

USHIO

Technical Information
No.040946①

Technical data

Rated Input Power		W	1430
Rated Current		A	65
Operating Current Range		A	45—70
Rated Voltage		V	22
Cold Arc Gap		mm	4
Lamp Length(L1)		mm	235
Lamp Length(L2)		mm	205
LCL(L3)		mm	96.5
Bulb Diameter		mm	ø 48
Base Diameter		mm	ø 25
Cathode Pin Diameter		mm	5/16-18 UNC.
Anode Pin Diameter		mm	ø 11
Cable Length		mm	—
Operating Position	Vertical	°	—
	Horizontal	°	±15
Base Surface Temperature		˚C	max. 200
Forced Air Cooling		m/s	4 to 6

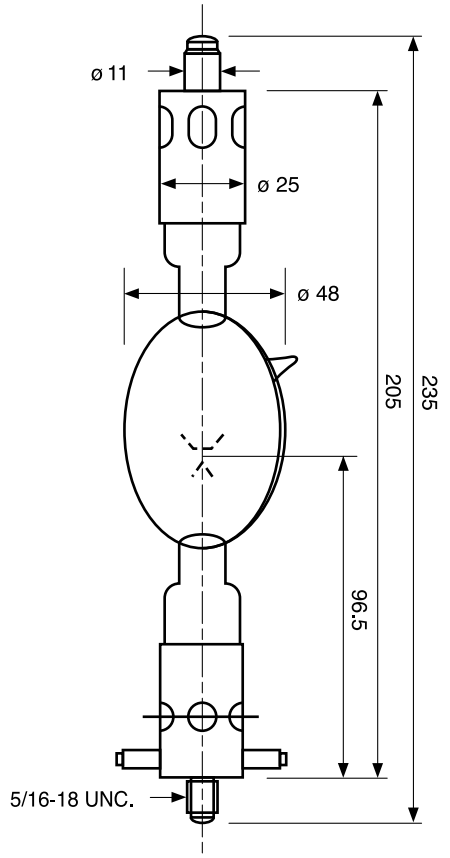

Memo

CXL-16SC

USHIO

Technical Information
No.040945①

Technical data

Rated Input Power		W	1430
Rated Current		A	65
Operating Current Range		A	45—70
Rated Voltage		V	22
Cold Arc Gap		mm	4
Lamp Length(L1)		mm	236
Lamp Length(L2)		mm	222
LCL(L3)		mm	96.5
Bulb Diameter		mm	ø 48
Base Diameter		mm	ø 25
Cathode Pin Diameter		mm	5/16-18 UNC.
Anode Pin Diameter		mm	—
Cable Length		mm	270
Operating Position	Vertical	°	—
	Horizontal	°	±15
Base Surface Temperature		˚C	max. 200
Forced Air Cooling		m/s	4 to 6

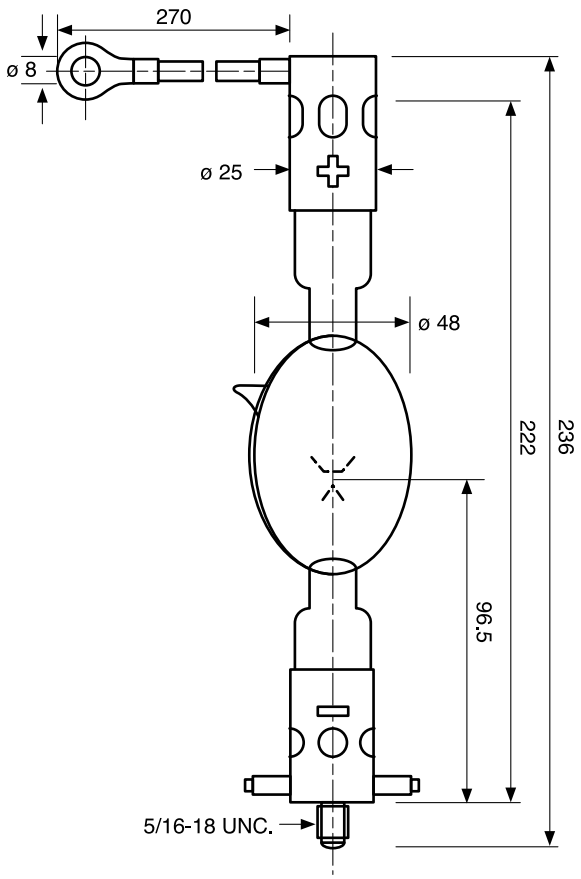

Memo