


# L810/PD060-40D59

metal can sealed as cathode common

L810/PD060-40D59 consists of a GaAlAs LED 810nm and a Si-PD mounted on TO-18 stem hermetically sealed with a glass flat can, and is designed to monitor reflected light through detector for controlling its own output power

◆ Outer dimension (Unit:mm)

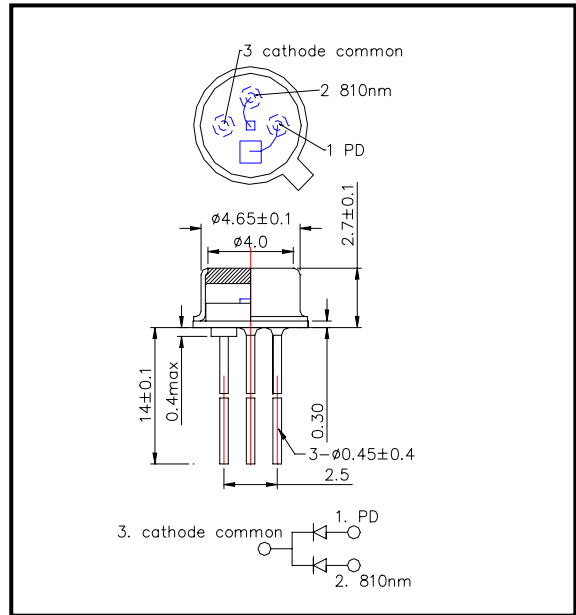

◆ Specifications

- 1) Product Name LED Lamp with PD Monitor
- 2) Type No. L810/PD060-40D59
- 3) Chip
  - (1) Chip material GaAlAs, Si (PIN)
  - (2) Peak wavelength 810nm
- 4) Package
  - (1) Stem TO-18
  - (2) Lens Φ4.0 Flat Glass
  - (3) Can Metal Can (Ni Plate)

◆ Absolute Maximum Ratings Ta=25°C

Device	Item	Symbol	Maximum Rated	Unit
LED	Power Dissipation	PD	170	mW
LED	Forward Current	IF	100	mA
LED	Pulse Forward Current	IFP	500	mA
LED	Reverse Voltage	VR	5	V
PD	Reverse Voltage	VR	100	V
	Operating Temperature	TOPR	-30 ~ +85	°C
	Storage Temperature	TSTG	-30 ~ +100	°C
	Soldering Temperature	TSOL	265	°C

‡Pulse Forward Current condition : duty=1% and tw=10us.

‡Soldering condition : Soldering condition must be completed within 3 seconds at 265°C

◆ Electro-Optical Characteristics Ta=25°C

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.70	2.00	V
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power	PO	IF=50mA	3.0	6.0		mW
Radiant Intensity	IE	IF=50mA	2.5	5.0		mW/sr
Peak Wavelength	λP	IF=50mA	790	810	830	nm
Half Width	Δλ	IF=50mA		35		nm
Viewing Half Angle	θ 1/2	IF=50mA		±55		deg.
Rise Time	tr	IF=50mA		60		ns
Fall Time	tf	IF=50mA		40		ns
Output Current	IL	VR=0V	100	200		uA
Dark Current	ID	VR=10V			10	nA

‡Total Radiated Power is measured by Photodyne #500.

‡Radiant Intensity is measured by Tektronix J-6512