

SMB850D-1100


High Power type Top LED with Lens

SMB850D-1100 is an AlGaAs LED mounted on copper heat sink with a 5*5 mm package and molded with super beam lens. These devices are intended to be operated at pulsed current of 3A for stable long life.

◆Outer dimension (Unit: mm)

◆Specifications

- | | |
|---------------------|-------------------------|
| 1) Product Name | High Power Top LED |
| 2) Type No. | SMB850D-1100 |
| 3) Chip | |
| (1) Chip Material | GaAlAs |
| (2) Chip Dimension | 1000um*1000um |
| (3) Chip Number | 1pce |
| (4) Peak Wavelength | 850nm typ. |
| 4) Package | |
| (1) Lead Frame Die | Silver Plated on Copper |
| (2) Package Resin | PPA Resin |
| (3) Lens | Epoxy Resin |

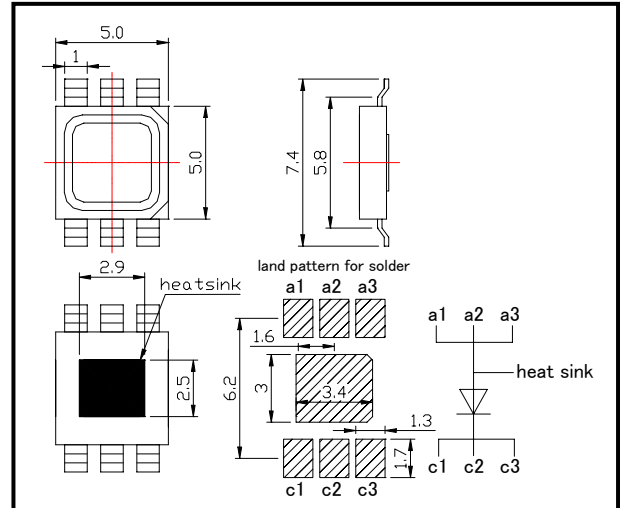

◆Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	P _D	3480	mW	T _a =25°C
Forward Current	I _F	1200	mA	T _a =25°C
Pulse Forward Current	I _{FP}	3000	mA	T _a =25°C
Reverse Voltage	V _R	10	V	T _a =25°C
Thermal Resistance	R _{thja}	6	K/W	
Operating Temperature	T _{OPR}	-30 ~ +85	°C	
Storage Temperature	T _{STG}	-30 ~ +100	°C	
Soldering Temperature	T _{SOL}	255	°C	

‡Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡Soldering condition: Soldering condition must be completed within 5 seconds at 255°C

‡Thermal resistance: junction – ambient air flow

◆Electro-Optical Characteristics [T_a=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V _F	I _F =1.2A		2.2	2.9	V
Pulsed Forward Voltage	V _F	I _{FP} =3A		3.5	4.7	V
Reverse Current	I _R	V _R =10V			10	uA
Radiated Power	P _O	I _F =1.2A	450	600		mW
Radiant Intensity	I _E	I _F =1.2A		370		mW/sr
Peak Wavelength	λ _P	I _F =100mA		850		nm
Half Width	Δλ	I _F =100mA		20		nm
Viewing Half Angle	θ _{1/2}	I _F =100mA		±63		deg.
Rise Time	t _r	I _F =100mA		15		ns
Fall Time	t _f	I _F =100mA		10		ns

‡Radiated Power is measured by S3584-08.

‡Radiant Intensity is measured by Tektronix J-6512.

USHIO EUROPE B.V. (www.ushio.eu)

Sky Park, Breguetlaan 16-18, 1438 BC, Oude Meer, The Netherlands

Tel: +31-20-4469-333

Fax: +31-20-4469-360

E-mail: led@ushio-europe.nl